
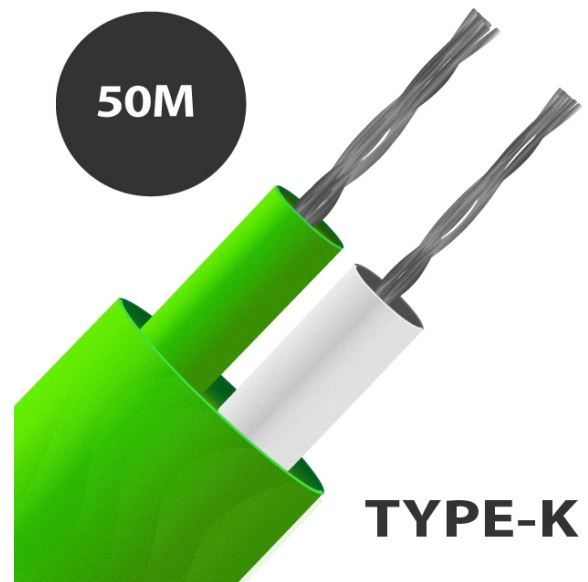
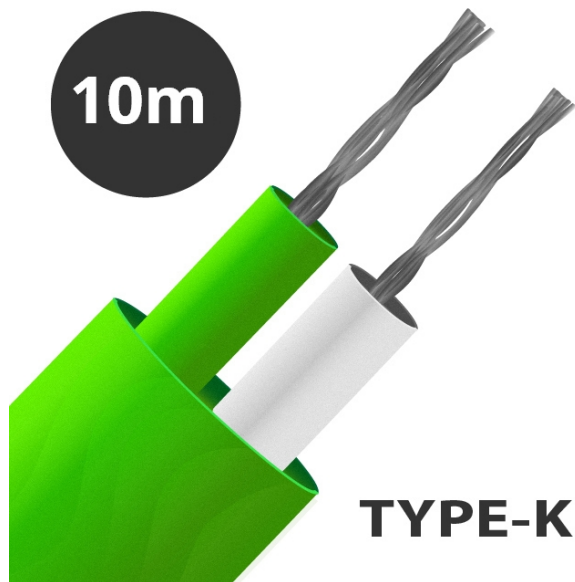


Typ K PFA-isoliertes Flachpaar-Thermoelementkabel / -kabel (IEC)

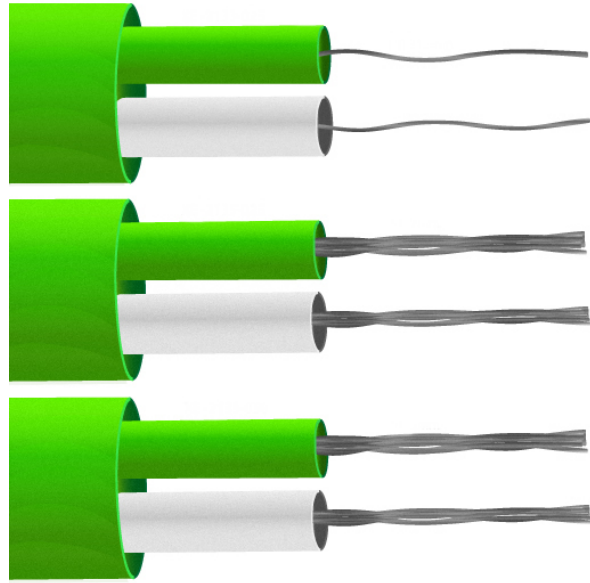

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Typ K PFA-isoliertes Flachpaar-Thermoelementkabel / -kabel (IEC)

PFA-Teflon-isoliertes flaches Paar. PFA-Teflon hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Öle, Säuren und andere schädliche Flüssigkeiten, Gase, Dampf und Druck.

Leistungsbeschreibung
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	5m, 10m, 25m, 50m, 100m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	1/0.2mm, 1/0.315mm, 7/0.2mm, 1/0.508mm
Conductor Cross Section 1/0.315 (mm²)	0.078
Conductor Cross Section 1/0.508 (mm²)	0.203
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Green
+ Colour	Green
- Colour	White
Drain Wire	No
Insulation Material	PFA Insulated



Loop Resistance 1/0.315 (Ohms per combined metre)	12.8
Loop Resistance 1/0.508 (Ohms per combined metre)	4.9
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	K
Tolerance	Class 1