
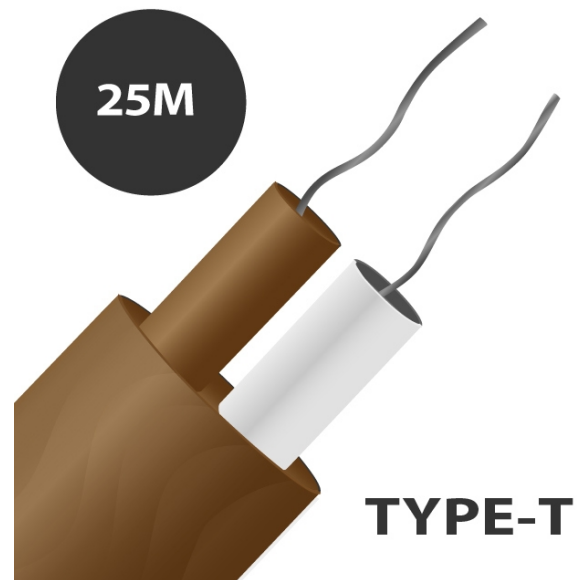
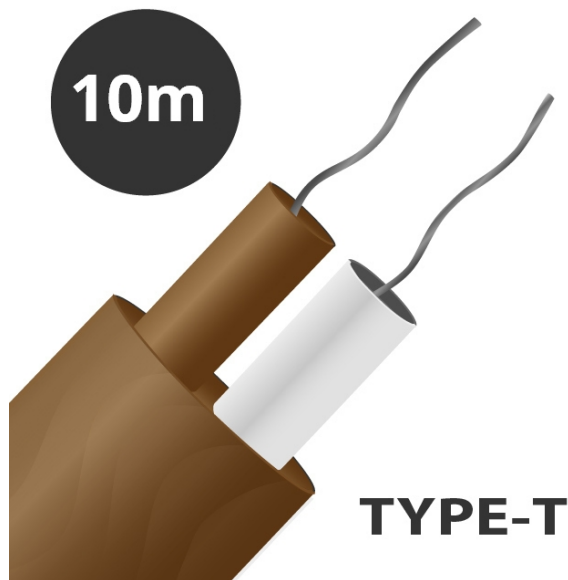


Typ T PTFE isoliertes Flachpaar Thermoelementkabel / Draht (IEC)

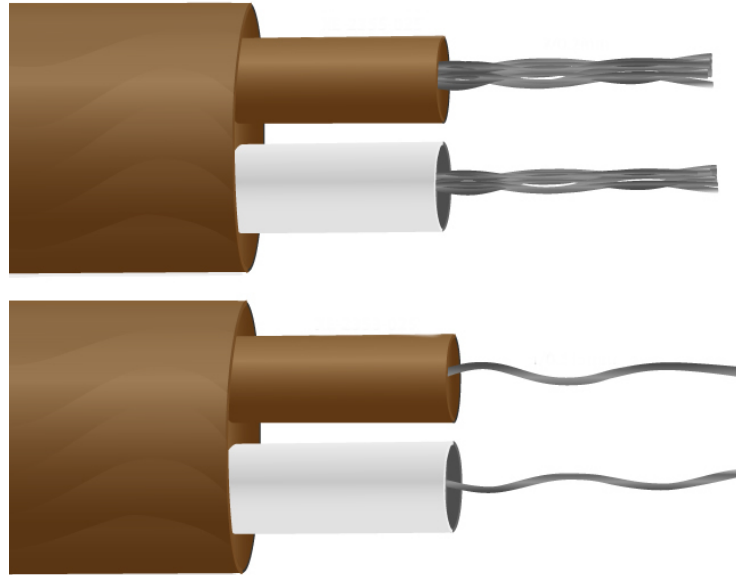

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Typ T PTFE isoliertes Flachpaar Thermoelementkabel / Draht (IEC)

PTFE-isoliertes flaches Paar. PTFE hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Öle, Säuren und andere nachteilige Flüssigkeiten.

Leistungsbeschreibung
Specifications

General Description	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Flat pair cable
Core / Strands	1/0.3mm, 7/0.2mm , 1/0.508mm
Conductor Cross Section 1/0.315 (mm²)	0.078
Conductor Cross Section 1/0.508 (mm²)	0.203
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Brown
+ Colour	Brown
- Colour	White
Drain Wire	No
Insulation Material	PTFE insulated



Loop Resistance 1/0.315 (Ohms per combined metre)	6.5
Loop Resistance 1/0.508 (Ohms per combined metre)	2.5
Loop Resistance 7/0.2 (Ohms per combined metre)	2.3
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Copper
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	T
Tolerance	Class 1