



## Typ K PTFE isoliertes Twin Twisted Pair ThermoelementKabel / Draht (IEC)

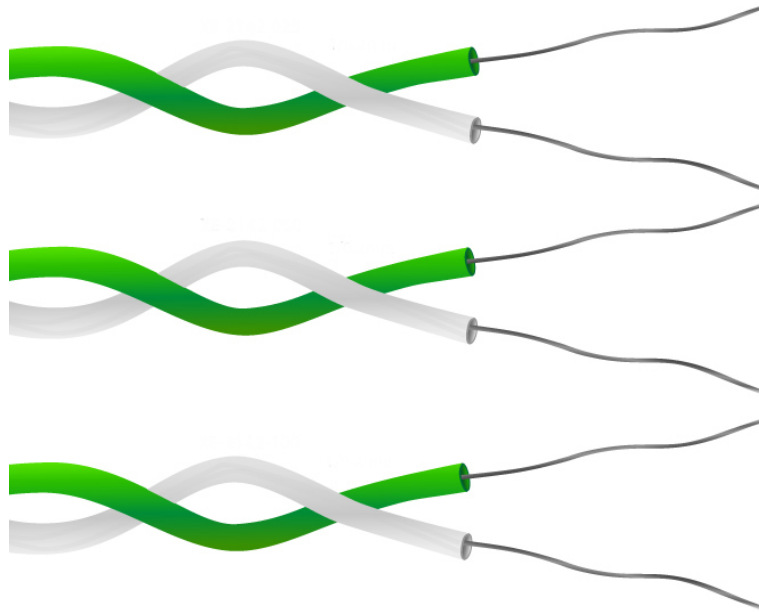


10m

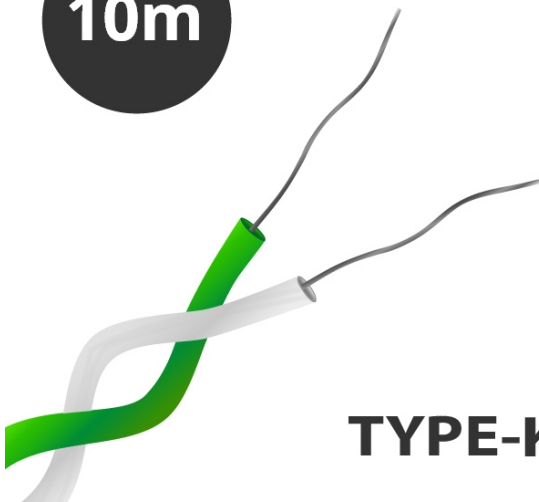

**TYPE-K**

50M

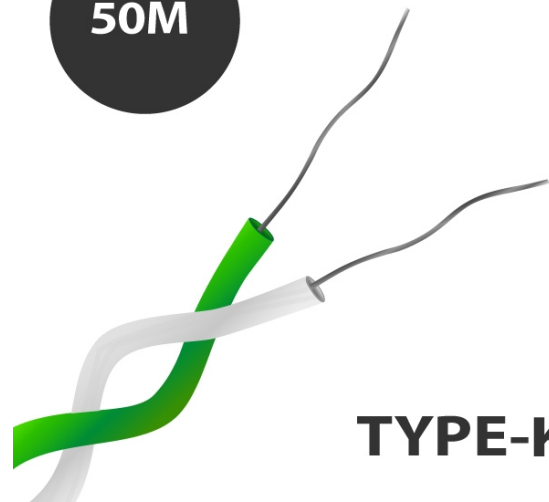

**TYPE-K**

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Typ K PTFE isoliertes Twin Twisted Pair ThermoelementKabel / Draht (IEC)**

PTFE-isoliertes Twin Twisted Pair. PTFE hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Öle, Säuren und andere nachteilige Flüssigkeiten.

**Leistungsbeschreibung**
**Specifications**

<b>General Description</b>	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
<b>Cable Length</b>	10m, 25m, 50m, 100m
<b>Cable Type</b>	Twin twisted pair for extending or making simple thermocouples
<b>Core / Strands</b>	1/0.2mm / 1/0.508mm, 1/0.315mm, 7/0.2mm
<b>Conductor Cross Section 1/0.2 (mm<sup>2</sup>)</b>	0.032
<b>Conductor Cross Section 1/0.315 (mm<sup>2</sup>)</b>	0.078
<b>Conductor Cross Section 1/0.508 (mm<sup>2</sup>)</b>	0.203
<b>Conductor Cross Section 7/0.2 (mm<sup>2</sup>)</b>	0.219
<b>+ Colour</b>	Green
<b>- Colour</b>	White
<b>Drain Wire</b>	No

<b>Insulation Material</b>	PTFE insulated
<b>Loop Resistance 1/0.2 (Ohms per combined metre)</b>	31.8
<b>Loop Resistance 1/0.315 (Ohms per combined metre)</b>	12.8
<b>Loop Resistance 1/0.508 (Ohms per combined metre)</b>	4.9
<b>Loop Resistance 7/0.2 (Ohms per combined metre)</b>	4.5
<b>Max. Temperature</b>	+260°C
<b>Min. Temperature</b>	-75°C
<b>+ Conductor</b>	Nickel Chromium
<b>- Conductor</b>	Nickel Aluminium
<b>Screen</b>	No
<b>Standards Met</b>	Colour code (cores & jacket) to IEC-584-3
<b>Thermocouple Type</b>	K
<b>Tolerance</b>	Class 1