
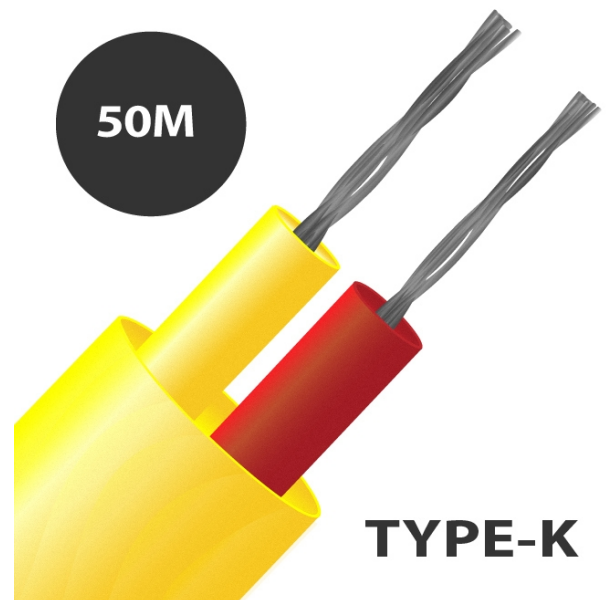


Typ K PFA isoliertes Flachpaar-Thermoelementkabel / -draht (ANSI)

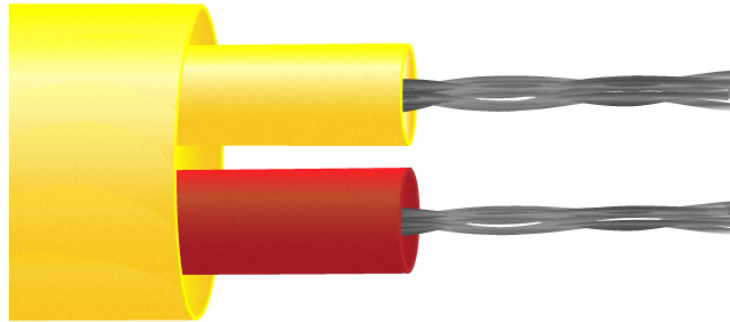

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Typ K PFA isoliertes Flachpaar-Thermoelementkabel / -draht (ANSI)

PFA-Teflon-isoliertes flaches Paar. PFA-Teflon hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Säuren, Alkalien und andere schädliche Flüssigkeiten, Gase, Dampf und Druck.

Leistungsbeschreibung
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10, 25, 50, 100m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	1/0.2mm, 1/0.3mm, 1/0.5mm,7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Yellow
+ Colour	Yellow
- Colour	Red
Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium



- Conductor	Nickel Aluminium
Screen	No
Standards Met	Colour code (cores & jacket) to ANSI MC96.1
Thermocouple Type	K
Tolerance	Class 1