
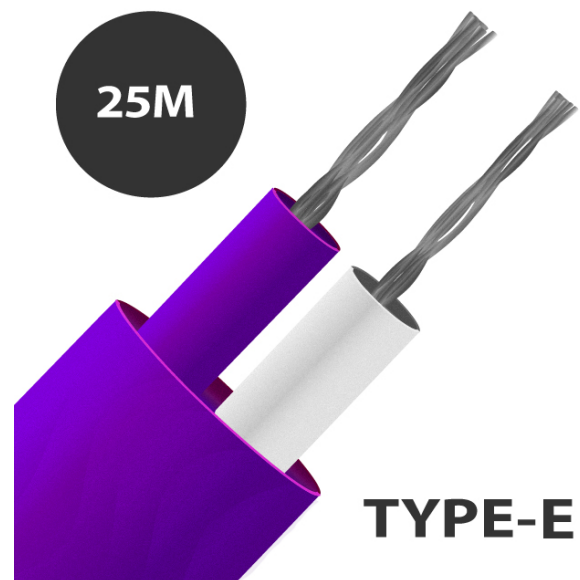
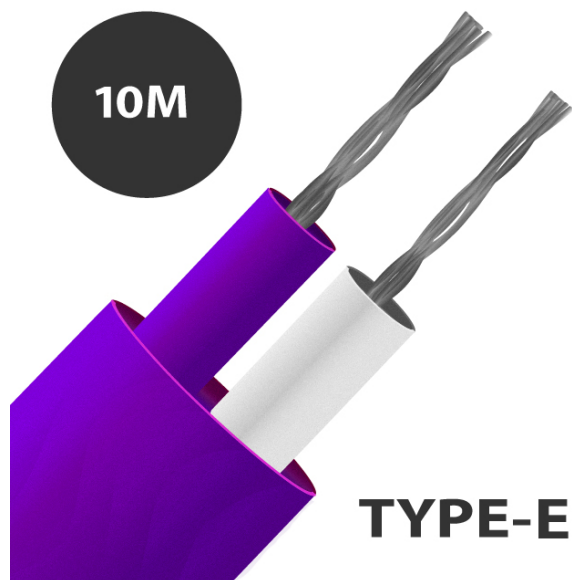


Typ E PFA Isoliertes Flachpaar ThermoelementKabel / Draht (IEC)

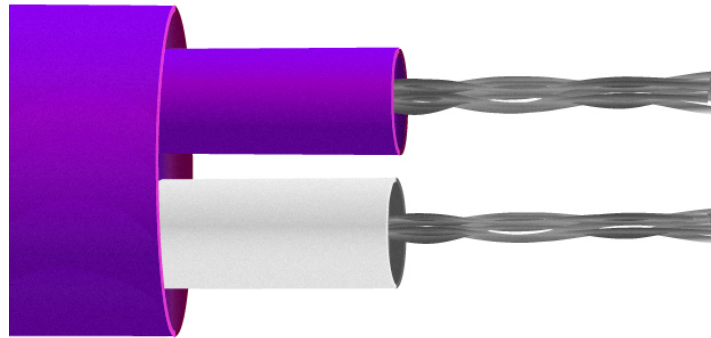

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Typ E PFA Isoliertes Flachpaar ThermoelementKabel / Draht (IEC)

PFA Teflon® isoliertes Flachpaar. PFA Teflon® hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Öle, Säuren und andere unerwünschte Flüssigkeiten, Gase, Dampf & Druck.

Spezifikationen
Specifications

General Description	Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
Cable Length	10m, 25m, 50m, 100m, 200m
Cable Type	Single pair of PFA insulated conductors, laid flat with PFA jacket
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Purple
+ Colour	Purple
- Colour	White
Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	5.3
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	E
Tolerance	Class 1