




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Typ N PTFE isoliertes Twin Twisted Pair Thermoelementkabel / Draht (IEC)




10m

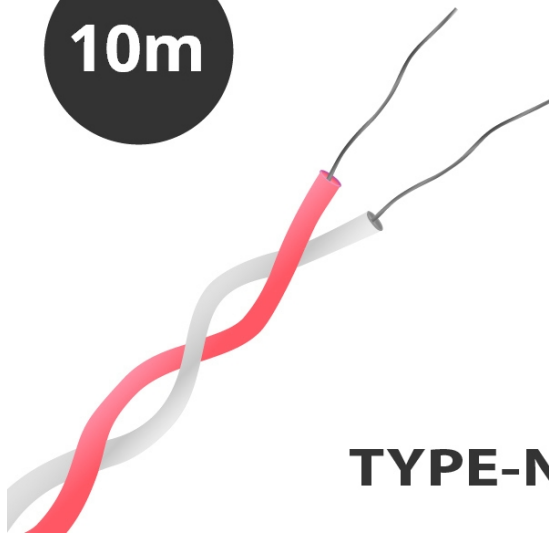

TYPE-N

25M

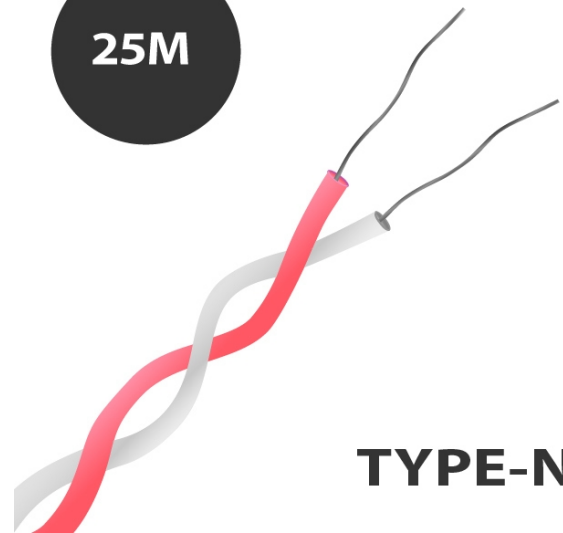

TYPE-N

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Typ N PTFE isoliertes Twin Twisted Pair Thermoelementkabel / Draht (IEC)

PTFE-isoliertes Twin Twisted Pair. PTFE hat eine gute mechanische Festigkeit und Flexibilität, beständig gegen Öle, Säuren und andere nachteilige Flüssigkeiten.

Leistungsbeschreibung
Specifications

General Description	Resistant to oils, acids adverse agents and fluids. Good mechanical strength and flexibility.
Cable Length	10m, 25m, 50m, 100m
Cable Type	Twin twisted pair for extending or making simple thermocouples
Core / Strands	1/0.2mm, 7/0.2mm
Conductor Cross Section 1/0.2 (mm²)	0.032
Conductor Cross Section 7/0.2 (mm²)	0.219
+ Colour	Pink
- Colour	White
Drain Wire	No
Insulation Material	PTFE insulated
Loop Resistance 1/0.2 (Ohms per combined metre)	44.2



Loop Resistance 7/0.2 (Ohms per combined metre)	6.2
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nicrosil
- Conductor	Nisil
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	N
Tolerance	Class 1