


Thermoelementkabel / Draht Typ U PVC isoliert flach paar (BS)

Type U, 7/0.2mm
PVC Flat Pair

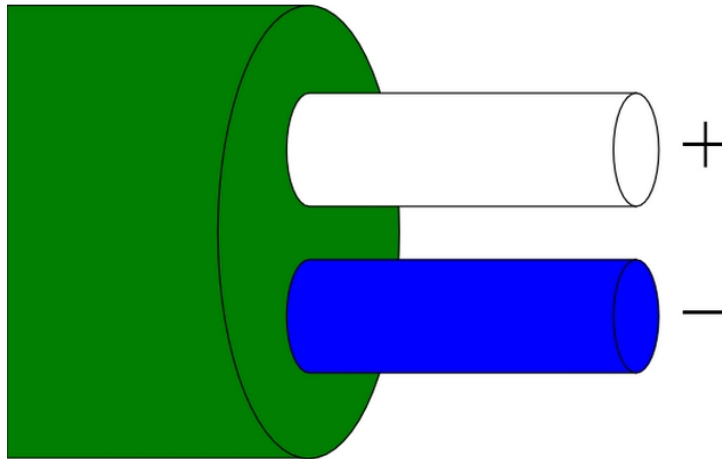

Thermoelementkabel / Draht Typ U PVC isoliert flach paar (BS)

Bild ist nur für Farbcodierung summieren

Der Preis ist pro Meter - bitte fügen Sie die erforderliche Menge für den Korb. Nur noch 1.155 Meter auf Lager

Das Kompensationskabel ähnelt der thermoelektrischen Eigenschaft des relevanten Thermoelements über einen begrenzten Umgebungstemperaturbereich, typischerweise 0° bis 80°C. Da diese Kabel aus kostengünstigen Materialien hergestellt werden, können bei Anlagenanlagen Kosteneinsparungen erzielt werden, verglichen mit dem laufenden echten Thermoelement-Verlängerungskabel.

Spezifikationen
Specifications

Product Code	WU-001-D
General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	Priced per metre
Cable Type	Flat pair construction
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm²)	0.219
Outer Colour	Green
+ Colour	White
- Colour	Blue
Insulation Material	PVC Insulated



Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+105°C
Min. Temperature	-10°C
Standards Met	BS
Thermocouple Type	U
Tolerance	Class 2