




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

0,5 mm Durchmesser Glatte Topfdichtung mit 1 Meter PFA-isolierter Leitung, 7/0,2 mm flaches Paar mit Enden isoliert oder geerdet

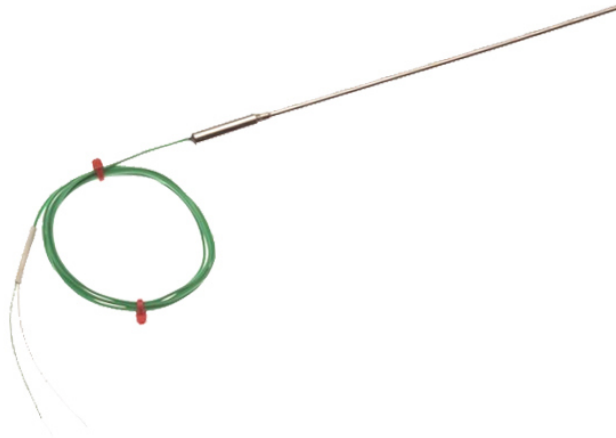

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

Schnelles Ansprechen Mineralisoliertes Thermoelement in Typ K. Verschiedene Lngen erhltlich, mit IEC-Miniaturstecker (220 C) fr einen schnellen und einfachen Anschluss.

Mssen Sie Ihren Temperatursensor kalibrieren?

Labfacility ist auf ISO17025 (UKAS)-Kalibrierstandards rckfhrbar und bietet die Wahl zwischen einer 3- oder 5-Punkt-rckfhrbaren Kalibrierung mit unserer hauseigenen Kalibriereinrichtung.

Bitte beachten Sie, dass Sie bezüglich der Lieferinformationen kontaktiert werden, wenn Sie Ihrer Bestellung eine Kalibrierungsoption hinzufügen. .

Leistungsbeschreibung

Specifications

General Description	Plain pot seal (200°C) with 1 Metre of PFA insulated lead, 7/0.2mm flat pair with tails.
Sensor Type	Mineral Insulated
Thermocouple Type	K
Element/hot junction	Single element, junction insulated or grounded from sheath
Probe Diameter	0.5mm
Probe Length	50, 100,150, 250mm
Sheath Material	K - Stainless steel 310
Pot Type	Plain (+200°C)
Cable Length	1M
Cable Type	PFA Teflon® insulated flat pair cable and tails (colour coded to IEC 584)
Core / Strands	7/0.2mm
Termination Type	Bare Tails



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Max. Temperature	K +650°C
Min. Temperature	K -40°C
Tolerance	Class 1
Standards Met	In accordance with IEC 584